

imageRUNNER ADVANCE DX C257/C357 Series

# **CONNECT SECURELY, TRANSFORM DIGITALLY**

INNOVATIVE SCAN TECHNOLOGY AND SMART SOFTWARE WORK HAND-IN-HAND

The future of business is digital. Canon imageRUNNER ADVANCE DX is a new generation of smart multifunction devices, designed to support and accelerate every step of your digital transformation. Built with Canon's imageRUNNER ADVANCE DNA, state-of-the-art technology and software work hand-in-hand to digitise, automate and optimise content-centric workflows.

Canon's imageRUNNER ADVANCE DX C257/C357 Series offers smart and secure A4 colour multifunction devices, maximising efficiency and providing 360° security for documents, devices and networks. A compact design delivers space-saving office flexibility and configurations without compromising on Canon's unique scanning technologies, which increase scan speed and accuracy for high-quality image processing. Native uniFLOW Online Express (uFOE) software harnesses the power of the cloud to centralise device management and enable cloud collaboration on documents.









SECURITY













# imageRUNNER ADVANCE DX C257/C357 Series

### ( CLOUD CONNECTIVITY

- Scan and print documents from any location with enhanced cloud connectivity, offered with re-usable print formats for ease of use
- Cloud-based software-as-standard uniFLOW Online Express offers a single integrated solution to device security and simplify print management
- Canon's MEAP platform optimises processes by integrating with document capture and output management solutions and various applications such as uniFLOW Online\*\*, AirPrint, Universal Print, Mopria, Google Cloud Print and Canon PRINT Business

# SECURITY

- Ensure information confidentiality and security across the network with IPsec and firewall functionality
- Set up device authentication, two-factor authentication and device function restrictions for both device and cloud-based security measures
- Encrypted PDF scanning ensures document security during scanning process

- Upgrade to uniFLOW Online\*\* for enhanced secure printing, mobile printing, and guest printing from any
- Combination of Verify system at start up and McAfee Embedded Control Software ensures device functionality is never compromised by the tampering of firmware and applications, all in real-time

# (M) PRODUCTIVITY

- Fast, high-quality scanning at 190 ipm (A4) with expansive connectivity options
- Automated scan, store and search workflows boost efficiency and reduce human error
- Device management tools such as iWEMC provide centralised control over the device fleet and print management
- Automatic removal of blank pages when scanning minimises process time
- Reusable formats, automatic file names from barcode data, Office format conversions, and cloud and device OCR with IRIS enable easy handling and fast document processing



#### SUSTAINABILITY

- Edit print settings at device-level for accurate scan
- Quiet operation and reduced paper hitting sounds during scanning is enabled thanks to technologies such as digital registration and a smooth ADF internal structure
- Automated and digitised processes minimise paper usage for a paperless office
- Reduce waste with high-quality scanning, including digital deskewing and advanced stain-resistant

#### ( COMPACT DESIGN

- Design versatility ensures seamless fit into any office size or layout, with desktop or floor-standing configuration
- No need for additional protruding attachments security functionality, such as IC Card reader for user authentication, is built in to the ADF\*\*\*
- Compact design is perfect for Human Resource departments, governmental bodies, hospitals and medical centres, legal firms and solicitors' offices, and real estate agencies.

\*\*uniFLOW Online is available as a Device Based Cloud Subscription for Document Output and Capture Management. Based on business needs, users can upgrade to uniFLOW Online to unlock a range of advanced benefits, including: increased security with user authentication methods. Personalised workflows to enhance productivity. Reduced wastage by releasing jobs at the device. An intuitive cloud dashboard to leverage real-time data. Greate control over access and usage to reduce print costs.

\*\*\*C357P Printer model requires optional IC Card Reader unit

NOTE - Certain features are only enabled with the combination of iR ADV DX and uniFLOW Online

#### **QUICK FACTS**



- Format: Colour A4
- Paper Supply Capacity (Max): 2,300 sheets
- Warm-up time: 4 seconds or less
- Finishing Capabilities: Collate, Group, Offset\*, Staple\* (\*only with optional Finisher)
- Supported File Types: PDF, EPS, TIFF, JPEG, and XPS



- Print speed: 25-35 ppm (A4)
- Scan speed: 190 ipm (A4)



- Print Languages: UFRII, PCL6, Adobe® PostScript 3
- Print Resolution: 600 x 600 to 1,200 x 1,200 (equivalent)
- Enhanced cloud connectivity enables collaborative document access from anywhere, with re-usable formats for easy handling
- Accurate, high-speed scanning is facilitated by Canon's innovative new paper feeding mechanism and stain-resistant
- Efficient workflow automation means documents are intuitively scanned, searched and stored with applications including OneDrive, SharePoint, Concur and Dropbox
- McAfee Embedded Control software alongside other security features offer complete peace of mind and a 360° protection covering document, network and device
- Simplified print management is enabled with centrally managed print settings and device usage analysis, provided through native uniFLOW Online Express (uFOE)
- Quiet ADF operation, low energy consumption and reduced emissions lower environmental impacts
- Seamlessly integrate into all-sized offices with the spacesaving design choice of a desktop or floor-standing unit

#### TAILORED SOLUTIONS TO MEET EVERY CHALLENGE

#### CORE

Perform routine office operations safely and with ease, with minimum hardware, embedded software including uFOE and services offering complete device maintenance and support.



**HARDWARE** 





SOFTWARE

#### **SERVICES**

#### **ENHANCED**

Boost performance with enhancements such as finishing options and security add-ons e.g. Data Removal Service. Choose solutions to expand cloud capabilities with uniFLOW Online including advanced scanning directly with your Google account.

#### **BESPOKE**

Choose tailored solutions for any business need by removing print management burdens. Consult with Canon experts to manage your extensive requirements, with bespoke solutions and Managed Services options.

#### Canon Ireland

3006 Lake Drive Citywest, Saggart Co. Dublin, Ireland Telephone No: 01 2052400 Facsimile No: 01 2052525

#### Canon (UK) Ltd

5 The Square Stockley Park Uxbridge **UB11 1ET** Tel: 01895 648 000 www.canon.co.uk

Canon Inc. canon.com

Canon Europe canon-europe.com English edition © Canon Europa N.V.,2020



# imageRUNNER ADVANCE DX C257/C357 Series


# COMPACT COLOUR A4 MULTIFUNCTION DEVICES\* WITH STREAMLINED WORKFLOWS FOR FAST, HIGH-QUALITY PRINTING AND SCANNING.





\*DX C357P is a printer only model

#### MAIN CONFIGURATION OPTIONS

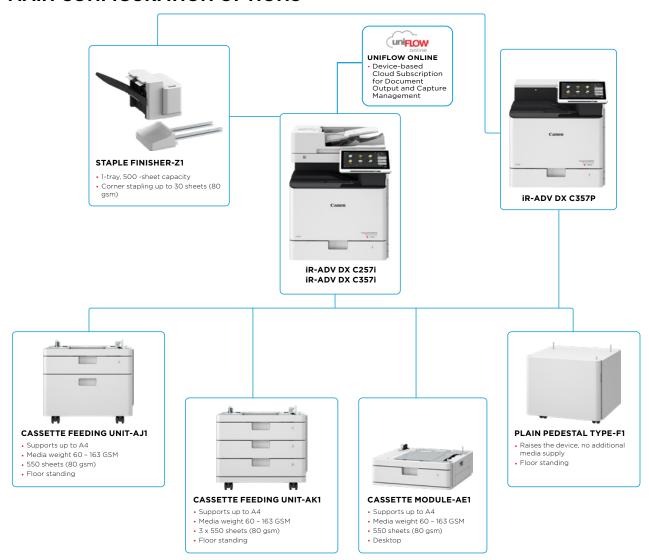

This flat configuration is for illustration purpose only. For a complete list of options and the exact compatibility relationships, please refer to the online product configurator.

The Unified Firmware Platform (UFP) ensures that the latest feature upgrades and protection are available, for an enhanced user experience across the entire iR ADVANCE DX portfolio.



# **TECHNICAL SPECIFICATIONS**

# imageRUNNER ADVANCE DX **C257/C357 Series**

MAIN UNIT Machine type A4 Colour Laser Multifunctional

Print, Copy\*, Scan\*, Send\*, Store and Optional Fax\*
\* Not applicable to iR-ADV DX C357P (Printer model) Core functions

Processor 1.75GHz Dual Core Processor

Control Panel 10.1" TFT LCD WSVGA Color Touch panel

Memory Standard: 3.0GB RAM

Paper Supply Capacity

(A4, 80gsm)

Standard\*: 320GB (available disk space: 250GB) Hard Disk drive

Interface Connection

NETWORK Standard: 1000Base-T/100Base-TX/10Base-T, Wireless

LAN (IEEE 802.11 b/g/n)
Optional: NFC, Bluetooth Low Energy

OTHERS

OTHERS Standard: USB 2.0 (Host) x1, USB 3.0 (Host) x1, USB 2.0 (Device) x1; Optional: Serial Interface, Copy Control Interface

Standard: 650 Sheets

100-sheets Multi-purpose tray 550-sheets Paper cassette x 1 Maximum: 2,300 Sheets (with Cassette Feeding Unit-AK1)

Standard: 250 Sheets Paper output capacity (A4, 80gsm)

Maximum: 500 Sheets (with Staple Finisher-Z1)

Standard: Collate, Group With Finisher: Collate, Group, Offset, Staple Finishing capabilities

Supported media types

Multi-purpose tray: Thin, Plain, Heavy, Recycled, Color, Transparency, Pre-punched, Bond, Label, Envelope

Paper Cassette: Thin, Plain, Heavy, Recycled, Color, Pre-punched, Bond, Envelope\*

Supported media sizes

Multi-purpose tray: Standard size: A4, A5, A5R, A6, B5, Custom Size: 98.0 x 148.0 mm to 216.0 x 355.6 mm Envelopes: COM10 No.10, Monarch, DL, ISO-C5 Envelope custom size: 98.0 x 148.0 mm to 216.0 x 355.6 mm

Paper Cassette: Standard size: A4, A5, A5R, A6, B5, Custom size: 98.0 x 190.5 mm to 216.0 x 355.6 mm Envelopes: COM10 No.10, Monarch, DL, ISO-C5

Supported media weights Multi-purpose tray: 60 to 220 gsm

Cassette: 60 to 163 gsm Duplex: 60 to 163 gsm

Warm-up Time

Quick Startup Mode: 4 seconds or less \*
(applicable to C357i/C257i)
\*Time from device power-on to when the copy icon appears and is
enabled to operate on the touch panel display.

From Sleep Mode: 10 seconds or Less
From Power On: 10 seconds or Less \*
\*IR-ADV DX C357i/C257i: Time from device power-on, until copy ready

(not print reservation) \* iR-ADV DX C357P: Time from device power-on, until print ready

(not print reservation)

Dimensions (W x D x H)

Installation Space(W x D)

Basic: 852 x 908 mm (with Multi-purpose tray extended + paper cassette open) Fully Configured: 1,407 x 908 mm (with Staple Finisher-Z1 + Multi-purpose tray extended + paper cassette open)

iR-ADV DX C357i/C257i: Approx. 48 kg (including toner) iR-ADV DX C357P: Approx. 41 kg (including toner) Weight

PRINT SPECIFICATIONS

iR-ADV DX C357i/DX C357P 35 ppm (A4), 26 ppm (A5R), 61 ppm (A5), 23 ppm (A6) iR-ADV DX C257i 25 ppm (A4), 26 ppm (A5R), 46 ppm (A5), 23 ppm (A6)

C357i: BW 35ipm/36ipm, CL 35ipm/36ipm C257i: BW 25ipm/26ipm, CL 25ipm/26ipm Duplex Print Speed (A4/LTR)

Print Resolution (dpi)

Page description languages

**Direct Print** 

Printing from mobile and cloud

information Fonts

information
PS fonts: 136 Roman
PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts,
Andalé Mono WT J/K/S/T\*
(Japanese, Korean, Simplified and Traditional Chinese),
Barcode fonts\*

\*\*Optional PCL International Font Set-A1 is required.

\*\*Optional Parcode Printing Kit-D1 is required.

\*\*Optional Parcode Printing Kit-D1 is required.

AirPrint, Mopria, Google Cloud Print, and Canon PRINT Business, and uniFLOW Online A range of software and MEAP-based solutions are available to provide printing from mobile devices or internet-connected devices and cloud-based services depending on your requirements. Please contact your sales representative for further information.

600 x 600 to 1,200 x 1,200 (equivalent)

Standard: UFR II, PCL6, Adobe\* PostScript\*  $3^{TM}$ Supported file types: TIFF, JPEG, PDF, EPS, and XPS

Secured Print, Secure Watermark, Header/Footer, Page Layout, Two-sided Printing, Toner Reduction, Poster Printing, Forced Hold printing, Print Date, Scheduled Printing, Printing Using a Virtual Printer Print Features

Operating System

COPY SPECIFICATIONS Copy Speed\* (BW/CL)

First-Copy-Out Time (A4; BW/ CL)

Copy resolution (dpi)

**Multiple Copies** 

Copy Density

Magnification

Copy Features

UFRII: Windows\* 7/8.1/10/Server2008/Server2008 R2/ Server2012/Server2012 R2 /Server2016 /Server2019, Mac OS X(10.10 or later) PCL: Windows\* 7/8.1/10/Server2008/Server2008 R2/ Server2012/Server2012 R2 /Server2016 /Server2019 PS: Windows\* 7/8.1/10/Server2008/Server2008 R2/ Server2012/Server2012 R2 /Server2016 /Server2019, Mac OS X(10.10 or later) PPD: Windows\* 7/8.1/10, Mac OS X(10.9 or later) McAfee Embedded Control Software As of Feb. 2020

iR-ADV DX C357i 35 ppm (A4), 26 ppm (A5R), 61 ppm (A5), 23 ppm (A6)

iR-ADV DX C257i 25 ppm (A4), 26 ppm (A5R), 46 ppm (A5), 23 ppm (A6)

iR-ADV DX C357i: Approx. 5.1/6.9 seconds or less iR-ADV DX C257i: Approx. 6.9/9.4 seconds or less

600 x 600, 300 x 600 Up to 999 copies

Automatic or Manual (9 Levels)

Variable zoom: 25% to 400% (1% Increments)
Preset reduction/enlargement: 25%, 50%, 70%, 100%(1:1), 141%, 200%, 400%

Preset R/E Ratios by Area, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Two-sided Original, Job Build, N on 1, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Secure Watermark, Print Date, Copy ID Card, Skip Blank Pages, Color Mode, Reserved copy, Copy Sample

SCAN SPECIFICATIONS

Standard type

Document Feeder Paper Capacity (80 gsm)

Acceptable originals and

Supported media sizes

Scan Speed (ipm: BW/CL, A4)

Scan Resolution (dni)

**Pull Scan Specifications** 

Scan Method

Destination

SEND SPECIFICATIONS

Address Book

Send resolution (dpi) Communication protocol

Universal Send Features

Single-pass Duplexing Automatic Document Feeder\*
[2-sided to 2-sided (Automatic)]
\* Detect Feeder Multi Sheet Feed is supported.

100 Sheets

Platen: Sheet, Book, and 3-Dimensional Objects

Document Feeder media weight:
1-sided scanning: 42 to 128 gsm (BW), 64 to 128 gsm (CL)
2-sided scanning: 50 to 128 gsm (BW), 64 to 128 gsm (CL)

Note: Business card: 80 to 220 gsm Original width narrower than A6 except business card: 50 to 128 gsm

Platen scanning size: up to 216.0 x 355.6 mm

A4, A5R, A6, B5, Custom size: 48.0 x 128.0 mm to 216.0 x 355.6 mm Business card: 48.0 x 85.0 mm to 55.0 x 91.0 mm

Send (300 x 300 dpi):

up to 95/190 when Automatic Colour Select "OFF" 1-sided Scanning: 95 2-sided Scanning: 190 Automatic Color Select "ON": 1-sided Scanning: 50 2-sided Scanning: 100

2-sided Scanning: IOC Copy: Scan Speed priority (300 x 600 dpi): 1-sided Scanning: 50 2-sided Scanning: 100 Image Quality priority (600 x 600 dpi): 1-sided Scanning: 30 2-sided Scanning: 50

Scan for Copy: up to  $600 \times 600$ Scan for Send: (Push) up to  $600 \times 600$ (SMB/FTP/WebDAV/IFAX), (Pull) up to  $600 \times 600$ Scan for Fax: up to  $600 \times 600$ 

Colour Network ScanGear2. For both TWAIN and WIA Supported OS: Windows\*7/ 8.1/ 10/ Server2008/ Server2008 R2/ Server2012/ Server2012 R2/ Server 2016 As of Feb. 2020

Push Scan, Pull Scan, Scan to Box, Scan to Advanced Space, Scan to Network, Scan to USB Memory Key, Scan to Mobile devices, Scan to cloud (uniFLOW Online - Optional)

Standard: E-mail/Internet FAX (SMTP), SMB3.0, FTP,

WebDAV, Mail Box Optional: Super G3 FAX, IP Fax (for iR-ADV DX C357i/C257i)

LDAP (2,000)/Local (1,600)/Speed dial (200)

Push: up to 600 x 600 Pull: up to 600 x 600

File: FTP(TCP/IP), SMB3.0 (TCP/IP), WebDAV E-mail/I-Fax: SMTP, POP3

E-final/FFaX: SMTIP, POPS Standard: TIFF, JPEG, PDF (Compact, Searchable, Apply policy, Optimize for Web, PDF A/1-b, Trace & Smooth, Encrypted, Device Signature, User Signature), XPS (Compact, Searchable, Device Signature, User Signature), Office Open XML (PowerPoint, Word)

Original Type Selection, Two-sided Original, Density
Adjustment, Sharpness, Erase Frame, Job Build, Delayed
Send, Preview, Job Done Notice, File Name, Subject/
Message, Reply-to, E-mail Priority, TX Report, Original
Content Orientation, Skip Blank Pages



# **TECHNICAL SPECIFICATIONS**

# imageRUNNER ADVANCE DX **C257/C357 Series**

FAX SPECIFICATIONS

Maximum Number of Connection Lines Modem Speed

Compression Method

Resolution (dpi)

Sending/Recording Size

FAX memory Speed dials

Group dials/destinations Sequential broadcast

Memory backup Fax Features

STORE SPECIFICATIONS Mail Box (Number supported)

Advanced Space

Advanced Space available

Advanced Space Features

SECURITY SPECIFICATIONS

Authentication and Access Control

**Document Security** 

Network Security

Device Management and Auditing

(Optional) 2 (2nd Line optional)

Super G3: 33.6 kbps G3: 14.4 kbps

MH. MR. MMR. JBIG

400x400 (Ultra Fine), 200x400 (Super Fine), 200x200 (Fine), 200x100 (Normal)

A4, A5\*, A6\*, B5\*/A4, A5, B5 \*Sent as A4

Up to 30,000 pages (2,000 jobs)

Max. 200 Max. 199 dials Max. 256 addresses

Sender's Name (TTI), Selecting the Telephone Line (when sending fax), Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Interrupt Transmission, Sequential Broadcasting, Password/Subaddress Sending, Confidential Mailbox, 2 on 1 Log

100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes Maximum 10,000 Pages (2,000 jobs) Stored

Communication Protocol: SMB or WebDAV
Supported Client PC: Windows\* 8.1/10
Concurrent Connections (Max.): SMB:64, WebDAV:3

Approx. 16GB

Authentication for Advanced Space Log-in, Sort Function, Printing a PDF File with a Password, imageWARE Secure Audit Manager Support, Search, File Preview, Authentication Management, Open to public, URITX, Backup/Restore

User Authentication (Picture Login, Picture and PIN Login, Card Login, Username and Password Login, Function Level Login, Mobile Login), Department ID Authentication (Department ID and PIN Login, Function Level Login), uniFLOW Online Express (PIN Login, Picture Login, Picture and PIN Login, Card Login, Card and PIN Login, Username and Password Login, Department ID and PIN Login, Function Level Login), Access Management System (Access Control)

Level Login), Access Management System (Access Control)
Print Security (Secure Print, Encrypted Secure Print, Forced
Hold Printing, uniFLOW Secure Print\*),
Receive Data Security (Confidential Fax Inbox Forwarding
Received Documents Automatically),
Scan Security (Encrypted PDF, Device Signature PDF/
XPS, User Signature PDF/XPS, Adobe LiveCycle\* Rights
Management E52.5 Integration), BOX Security (Mail Box
Password Protected, Advanced Space Access Control),
Send Data Security (Setting for requesting password input
per transmission, Restricted e-mail/File send functions,
Confirming FAX number, Allow/Restrict Fax Driver
Transmissions, Allow/Restrict Sending from History,
S/MIME Support), Document Tracking (Secure Watermark)
\*Requires uniFLOW Online / uniFLOW

\*\*Requires uniFLOW Online / uniFLOW
TLS 1.3, FTPS, IPSec, IEEE802.1X authentication, SNMP
V3.0, Firewall Functionality (IP/MAC Address Filtering), Dual
Network Support (Wired LAN/Wireless LAN, Wired LAN/
Wired LAN), Disabling Unused Functions (Enabling/Disabling
Protocols/Applications, Enabling/Disabling Remote UI,
Enabling/Disabling USB Interface), G3 FAX separation from
LAN, USB Port separation from LAN, Prohibit the execution
of files stored in Advanced Space in the MFP, Scan and Send
-Virus Concerns for E-mail Reception

Protecting HDD Data (HDD Data Encryption (FIPS140-2 Validated), HDD Data Overwrite Erase, HDD Lock), Standard HDD Initialize, Trusted Platform Module (TPM), Job Log Conceal Function, Protecting MFD Software Integrity, Checking MFD Software Integrity (Verify System at Startup, Runtime Intrusion Detection), Comply IEEE/2600.2 (Common Criteria Certification) (in evaluation)

Administrator Password, Digital Certificate And Key Management, Audit Log, Cooperating with External Security Audit System (Security Information and Event Management), Image Data Logging, Security Policy Setting Device administration and Security administration Passwords

ENVIRONMENTAL SPECIFICATIONS

Operating Environment

Power consumption

Temperature: 10 to 30 °C Humidity: 20 to 80 % RH (Relative Humidity)

220-240 V, 50/60 Hz, 3.9 A

220-240 V, 50/60 HZ, 5.9 d
Maximum: Approx. 1,500 W
Copying (iR-ADV DX C357i/C257i with DADF continuous scam): 575.4 W\*
Printing (iR-ADV DX C357P) [LAN Print (color mode, duplex, with Cassette Feeding unit-AK1)]: 488.5 W\*
Standby: Approx. 40.3 W\*
Sleep mode: Approx. 0.8 W\*
\*\*
Reference value: measured one unit
\*\*
\*\*
\*\*2 0.8 W sleep mode is not available in all circumstances due to certain settings.

settings.
Typical Electricity Consumption (TEC)\*:
iR-ADV DX C357i/C357P: 0.35 kWh
iR-ADV DX 257i: 0.23 kWh

\*As per USA Energy Star 3.0

Sound Power Level (LWA, m)\*

Active (BW) (1-sided): iR-ADV DX C357i/C357P: 6.5 B, Kv 0.3 B iR-ADV DX C257i: 6.2 B, Kv 0.3 B

\* Reference value: measured only one unit with ISO7779, described with ISO9296 (2017)

Sound Pressure (LpAm) South Plessare (LPAIII)

Bystander's position:
Active (BW) (1-sided):
IR-ADV DX (257): 49 dB\*
IR-ADV DX (257): 49 dB\*
Standby:
IR-ADV DX (357)/(257P/C257i: 8 dB
\*Reference value: measured only one unit with ISO7779, described with ISO9296 (2017)

Blue Angel

Standards CONSUMABLES

Toner Cartridges

Toner (Estimated Yield @ 5% Coverage)

SOFTWARE AND PRINTER MANAGEMENT

Tracking and reporting

Remote management tools

Scanning software

Document Publishing

PAPER SUPPLY OPTIONS

Cassette Module-AE1

Cassette Feeding Unit-AJ1

Cassette Feeding Unit-AK1

C-EXV 55 Toner BK/C/M/Y

C-EXV 55 TONER BK: 23,000 pages C-EXV 55 TONER C/M/Y: 18,000 pages

For detailed information please visit our website

Universal Login Manager (ULM) uniFLOW Online Express\*

\* For more information, please refer to uniFLOW Online Express uniFLOW Online

iW Management Console eMaintenance Content Delivery System

Network ScanGear

MEAP (Multifunctional Embedded Application Platform) Kofax PowerPDF (optional)

Paper Capacity: 550 sheets (80 gsm)
Paper Type: Thin, Plain, Heavy, Recycled, Color, Pre-punched, Bond
Paper Size: A4, A5R, B5,
Custom size: 98.0 x 190.5 mm to 216.0 x 355.6 mm
Paper Weight: 60 to 163 gsm
Power Source: From the Main Unit
Dimensions (W x D x H): SII x 508 x 159 mm
(attached to the main unit)
Weight: Approx. 10 kg

Weight: Approx. 10 kg
Paper Capacity: 550 sheets (80 gsm)
Paper Type: Thin, Plain, Recycled, Heavy, Color,
Pre-punched, Bond
Paper Size: A4, ASR, 85
Custom size: 98.0 x 190.5 mm to 216.0 to 355.6 mm
Paper Weight: 60 to 163 gsm
Power Source: From the Main Unit
Dimensions (W x D x H): 511 x 508 x 425 mm
(attached to the main unit)
Weight: Approx. 16 kg

Weight: Approx. 16 kg
Paper Capacity: 550 sheets (80 gsm) x 3 cassettes
Paper Type: Thin, Plain, Recycled, Heavy, Color, Prepunched, Bond
Paper Size: A4, ASR, B5
Custom size: 98.0 x 190.5 mm to 216.0 to 355.6 mm
Paper Weight: 60 to 163 gsm
Power Source: From the Main Unit
Dimensions (W x D x H): 511 x 508 x 425 mm
(attached to the main unit)
Weight: Approx. 19 kg



# **TECHNICAL SPECIFICATIONS**

# imageRUNNER ADVANCE DX **C257/C357 Series**

OUTPUT OPTIONS\*

Staple Finisher-Z1

\*\*Paper capacity may vary with different paper type/size.

Tray Capacity (80 gsm):
A4, A5, A5R, A6, B5: 500 sheets
Paper Weight: 50 to 220 gsm

Staple Position: Corner

Staple Capacity:
A4, B5: 30 sheets (60 to 105 gsm)
Power Source: From the Main Unit
Dimensions (W x D x H): 555 x 459 x 301 mm (Unit size)
Weight: Approx. 14 kg

HARDWARE ACCESSORIES

**Card Readers** 

Various card readers available e.g. MiCard Plus. Please contact local Canon Office for more details. Copy Card Reader-F1 Copy Card Reader Attachment-B5

SYSTEM AND CONTROLLER OPTIONS

Print Accessories Barcode Printing System Accessories PCL International Font Set-A1 Barcode Printing Kit-D1

Copy Control Interface Kit-A1 Connection Kit-A2 for Bluetooth LE NFC Kit-E1 Serial Interface Kit-K3

FAX Accessories

Super G3 FAX Board-AT1 Super G3 2nd Line Fax Board-AT1 Remote Fax Kit-A1 IP FAX Expansion Kit-B1

OTHER OPTIONS

Accessibility Accessories Consumables

ADF Access Handle-A1

Staple-P1

#### **Software & Solutions**















#### **Certifications and compatibility**







**Canon Ireland** 

3006 Lake Drive Citywest, Saggart Co. Dublin, Ireland Telephone No: 01 2052400 Facsimile No: 01 2052525

canon.ie

Canon (UK) Ltd

5 The Square Stockley Park Uxbridge UB11 1ET Tel: 01895 648 000

www.canon.co.uk

Canon Inc. canon.com **Canon Europe** canon-europe.com

English edition © Canon Europa N.V.,2020

