TECLINIC AL CLIADACTEDICTICO

SYSTEM SPECIFICATIONS	MF652 ^{plus}	MF752 ^{plus}
Гуре table/stand-alone	Colour stand-alone	
CPU controller	PowerPC MPC8536 @ 1.2 GHz	
System memory	2 GB	
Hard disk	250 GB	
nterfaces	10-Base-T/100-Base-T/1,000-Base-T Ethernet; USB 1.1, USB 2.0, USB Host	
Network protocol	TCP/IP (IPv4 / IPv6), IPX/SPX, NetBEUI, AppleTalk (EtherTalk), SMB, LPD, IPP, SNMP, HTTP	
First copy/print out	3.7 sec. b/w and 5.3 sec. colour (A4)	3.6 sec. b/w and 5.3 sec. colour (A4)
Copy/print speed	60 ppm colour and 65 ppm b/w (A4)	60 ppm colour and 75 ppm b/w (A4)
	30 ppm colour and 33 ppm b/w (A3)	30 ppm colour and 37 ppm b/w (A3)
A4 duplex speed	60 ppm colour and 65 ppm b/w	60 ppm colour and 75 ppm b/w
Max. format originals	A5 - A3	
Paper format	A6-SRA3, personalised paper format, banner paper max. 1,200 x 297 mm	
Max. copy/print volume (monthly)	250,000 pages	275,000 pages
Paper weight	Trays 1-4: 52-256 g/m² - Bypass: 52-300 g/m²	
Warm-up time	~ 22 seconds (from main switch)	
ower	AC 220-240V 10A (50/60Hz)	
Electric absorption	2.1 kW or less	
Automatic duplex	Paper format: A5-SRA3 - weight: 52-256 g/m ²	
Dimensions (WxDxH)	650 x 799 x 1,155 mm	
Weight	Approximately 221 kg	
SCANNER		
Гуре	Colour scanner	
A4 speed	Up to 180/180 opm	
Resolution	600 x 600 dpi	
File format	JPEG, TIFF, PDF, PDF/A 1a and 1b (optional). Compact PDF, Encrypted PDF, Searchable PDF (optional) XPS, Compact XPS,	
	PPTX and searchable PPTX (optional).	
Automatic document feed	Dualson ADE	
Scan method	Network TWAIN scan, scan-to-eMail (scan-to-Me), scan-to-FTP, Scan-to-SMB (scan-to-Home), scan-to-Box, scan-to-WebDAV,	
	scan-to-DPWS, scan-to-USB	
Scan destinations	2,100 (single + group), LDAP support	
PRINTER		
Resolution	1,800 x 600 dpi (standard) – 1,200 x 1,200 dpi (high	quality)
Emulations	PCL 6c, PostScript 3, XPS	
Operating systems		ndows 7 32/64bit, Server 2003/2008 32/64bit, 2008 R2/2012 64bit, Maci
- F-: 3 3 3 3 5 C 1113	Williams Ar 32/04bit, Williams VISTA 32/04bit, Williams 7 32/04bit, Server 2003/2006 32/04bit, 2006 N2/2012 04bit, Macinia	

Fonts

Printer functions

COPIER	•	
Print process	Electrostatic, indirect tandem laser copy	
Toner type	Polymer toner, chemical	
Copy resolution	600 x 600 dpi	
Greyscale	256 levels	
Zoom	Pre-set: 3 types – Zoom: 25-400% (0.1% increments)	
Copy functions	Chapter, insertion sheet and cover, test copy (print and display), test print regulation, digital creative functions, job memory, poster	
	mode image repeat superimpose stamp convinctection, hadge conv	

PCL: 80 European - PS: 137 European Type 1
Direct printing for PCL, PS, TIFF, XPS, PDF and encrypted PDF, Mixmedia and Mixplex, OOXML (DOCX, XLSX, PPTX), "Easy Set" job

USER BOX SPECIFICATIONS

Max. box memory	Up to 3,000 documents or 10,000 pages
Type of system box	Public, private (with password or authentication), group (with authentication)
Type of system box	Secure printing, encrypted PDF printing, fax receipt, fax polling
User box functions	Reprinting, combination, download, send (e-mail, FTP, SMB and fax), box-to-box copy
EAV	

IAA	
Fax standard	Super G3 (optional)
Fax transmission	Analog, i-Fax, Colour i-Fax (RFC3949-C), IP-Fax
Fax resolution	Max.: 600 x 600 (ultra-fine)
Fax compression	MH, MR, MMR, JBIG
Modem fax	Up to 33.6
Fax destinations	2,100 (single + group)
Fax functions	Polling, deferred, PC-Fax, reception in private boxes, reception via email/FTP/SMB, up to 400 job programs

FINISHER OPTIONS

Corner, Two-point stapling, Two-hole punching, Four-hole punching, Booklet, Letter fold, Z-fold, Duplex, Combined mixplex / mixmedia, Sheet insertion report, Offset sorting, Banner printing (1.2 m)

Performance refers to use of product in optimal conditions. With the right to change technical characteristics. The registered trademarks belong to their respective owners. The d-Color MF652plus / MF752plus are distributed by Olivetti S.p.A. (03/14) - Code: 29188-00

10015 IVREA (TO) ITALY www.olivetti.it



OS X 10.x, Unix/Linux/Citrix

programming, superimpose, watermark, copy protection























d-COLOR MF652 plus MF752 plus

The d-COLOR MF652plus and MF752plus provide all the functions of a small printing centre in a single solution: speed, top-level performance and optimised colour profile management. Nor are they frightened of hard work: with their cutting-edge technology, these systems handle the heaviest workloads without any problems. Top-of-the-range features, as well as strict compliance with the latest environment



INNOVATIVE MULTI-TOUCH DISPLAY

REMOTE DISPLAY FROM TABLETS

DIRECT SCANNING AND PRINTING IN OFFICE FORMATS

2 GB RAM AND 250 GB HDD

ADVANCED CUSTOMISATION SOLUTIONS

YOUR OWN PRINTING CENTRE

With speeds up to 75 pages per minute and high 1200 x 1200 dpi print resolution, the new Olivetti d-Color MF652plus and d-Color MF752plus handle the heaviest office workloads without difficulty. The systems also offer solutions for print production centres or graphics artists, thanks to the Fiery option for optimised colour profile management. Both model are fully compliant with the new Energy Star 2.0 standard.



9" multi-touch display with 10-key pad (optional)



Advanced security options, multiple authentication systems

JUST A SIMPLE TOUCH

The innovative 9" colour display provides innovative functions for this category. Zoom, rotation and scrolling are just some of the features that, combined with ease of use, make this display unique. It can also be controlled from a remote tablet or PC, with replication of the entire panel.

LIMIT-FREE PRINTING

The new Olivetti d-Color MF652plus and d-Color MF752plus support market-standard PostScript and PCL printer emulations.


Documents can be printed from PCs, networks, FTP as well as USB sticks, to guarantee direct printing of Microsoft Office formats (docx, xlsx, pptx).

SECURE AND ECO FRIENDLY

Integration with Active Directory or badge-based authentication ensure controlled access to printing and also provide the IT manager with important tools to monitor costs and cut paper and toner waste, for a more sustainable print environment. Secure use and respect for the environment, assisted by low TEC values.



OPTIONS

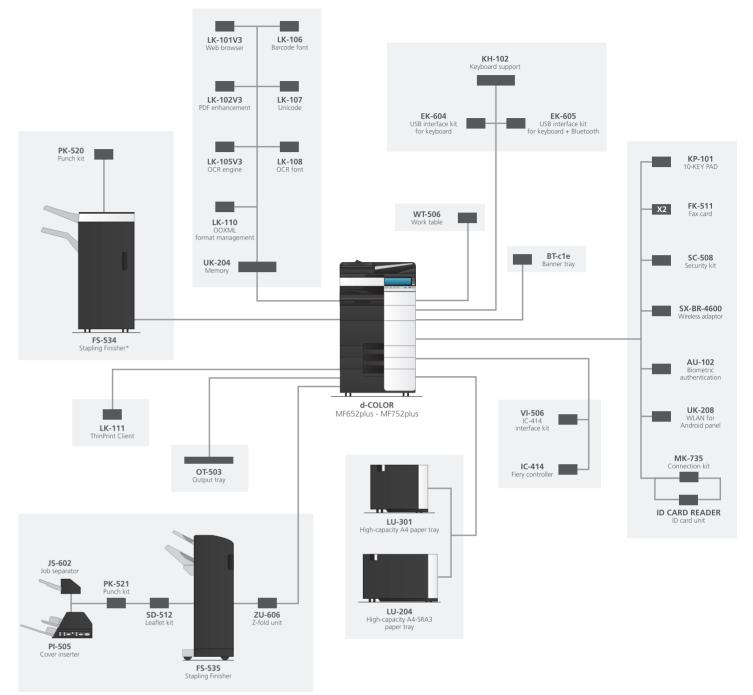

* Also available in an FS-534SD version (integrated SD 511)



d-Color MF752plus d-Color MF652plus